

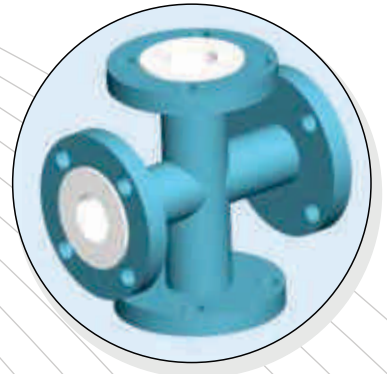
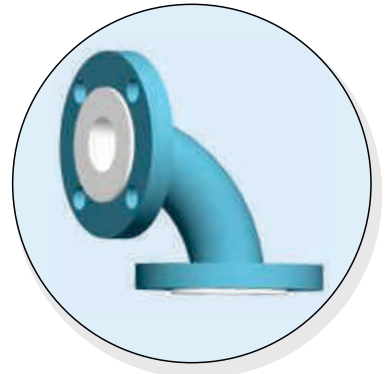
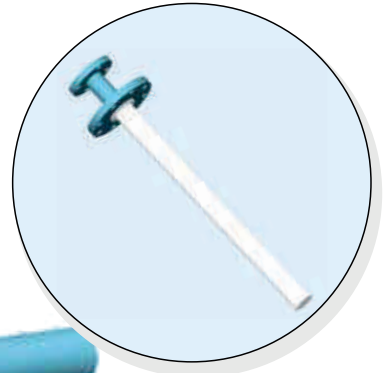



Heta Glass Industries

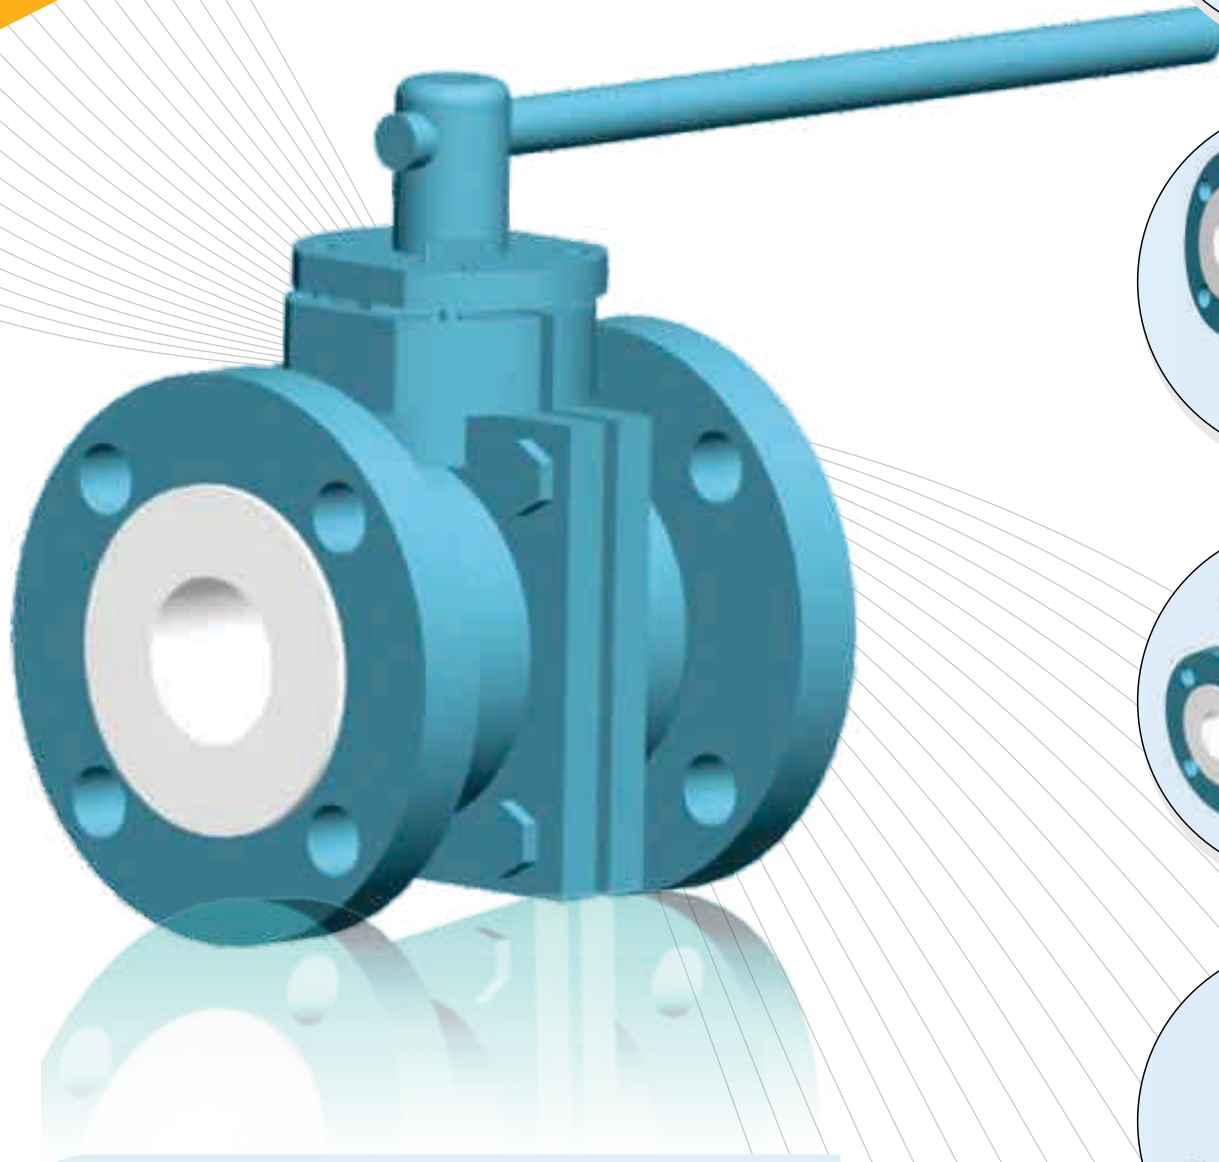

**ULTIMATE SOLUTION FOR
FLUID TRANSMISSION WORLD...**



LINED REDUCING FLANGE

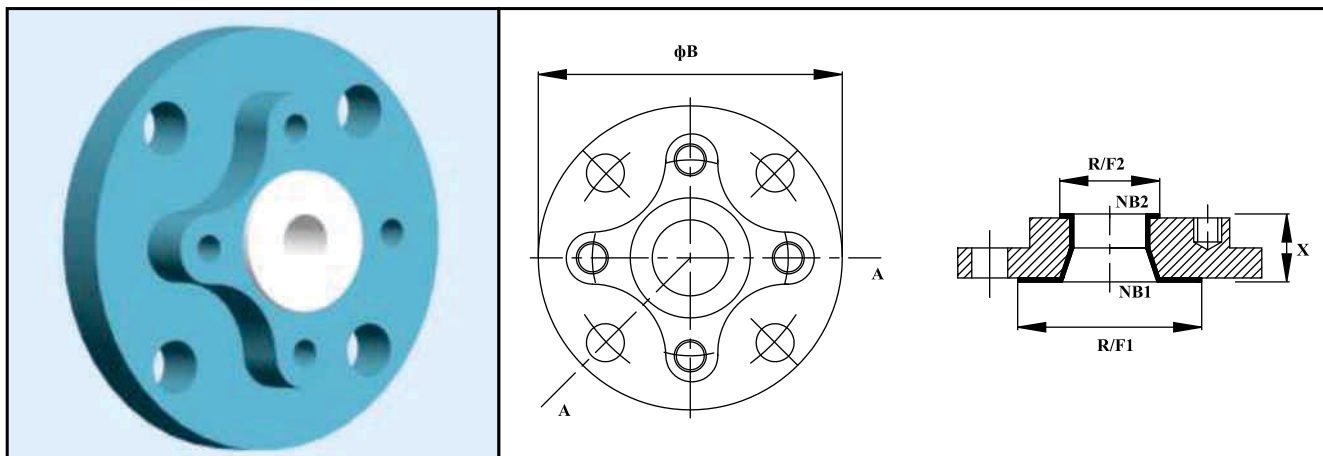

HOUSING MATERIAL

Flanges : IS 1865-1991 Grade 400/15
Liner : FEP

OPTIONS


Flanges : Drilling DIN PN 10/16, BS 10, ASME 300 Mixed Thread Metrics
Material : Stainless Steel
Liner : PFA
Extras : Earthing Studs / Lugs Vent Extensions

DESIGN SPECIFICATION

Flange : As per ANSI B 16.5/B 16.42
Face to face : As per ANSI B 16.5 # 150
Lining Thickness : 3 to 5 mm
Other Flange Drilling like DIN 2632/2633, BS 10 Table D, E or F are also available on request

TEST & INSPECTION DATA

Spark Test : 15 KV D.C. After Lining



LINED REDUCING FLANGE

Nominal Bore (NB)				Thickness (X)	?B	R/F 1	R/F 2	Liner Thickness
NB1		NB2						
(mm)	(Inches)	(mm)	(Inches)	(mm)	(mm)	(mm)	(mm)	(mm)
40	1.5	25	1	35	127.0	73	51	5.0
50	2	25	1	35	152.4	92	51	5.0
50	2	40	1.5	35	152.4	92	73	5.0
65	2.5	25	1	35	177.8	105	51	5.0
65	2.5	40	1.5	35	177.8	105	73	5.0
65	2.5	50	2	35	177.8	105	92	5.0
80	3	25	1	45	190.5	127	51	5.0
80	3	40	1.5	45	190.5	127	73	5.0
80	3	50	2	45	190.5	127	92	5.0
100	4	25	1	45	228.6	157	51	5.0
100	4	40	1.5	45	228.6	157	73	5.0
100	4	50	2	45	228.6	157	92	5.0
100	4	80	3	45	228.6	157	127	5.0
125	5	25	1	45	254.0	186	51	5.0
125	5	40	1.5	45	254.0	186	73	5.0
125	5	50	2	45	254.0	186	92	5.0
125	5	80	3	45	254.0	186	127	5.0
125	5	100	4	45	254.0	186	157	5.0
150	6	25	1	54	279.4	216	51	5.0
150	6	40	1.5	54	279.4	216	73	5.0
150	6	50	2	54	279.4	216	92	5.0
150	6	80	3	54	279.4	216	127	5.0
150	6	100	4	54	279.4	216	157	5.0
200	8	25	1	54	342.9	270	51	5.0
200	8	40	1.5	54	342.9	270	73	5.0
200	8	50	2	54	342.9	270	92	5.0
200	8	80	3	54	342.9	270	127	5.0
200	8	100	4	54	342.9	270	157	5.0
200	8	150	6	54	342.9	270	216	5.0
250	10	25	1	54	406.4	324	51	4.5
250	10	40	1.5	54	406.4	324	73	4.5
250	10	50	2	54	406.4	324	92	4.5
250	10	80	3	54	406.4	324	127	4.5
250	10	100	4	54	406.4	324	157	4.5
250	10	150	6	54	406.4	324	216	4.5
250	10	200	8	54	406.4	324	270	4.5
300	12	25	1	54	482.6	381	51	4.5
300	12	40	1.5	54	482.6	381	73	4.5
300	12	50	2	54	482.6	381	92	4.5
300	12	80	3	54	482.6	381	127	4.5
300	12	100	4	54	482.6	381	157	4.5
300	12	150	6	54	482.6	381	216	4.5
300	12	200	8	54	482.6	381	270	4.5
300	12	250	10	54	482.6	381	324	4.5

HG

Honesty

Efficiency

Transparency

Ambitions



**Heta Glass
Industries**

Office & Factory :

336/25/A, G.I.D.C., Makarpura, Vadodara-390010

M : 098250 76022, 099789 00795, Ph. : 0265 - 2637622

E-mail : hiren@hetaglass.com • nimesh@hetaglass.com