

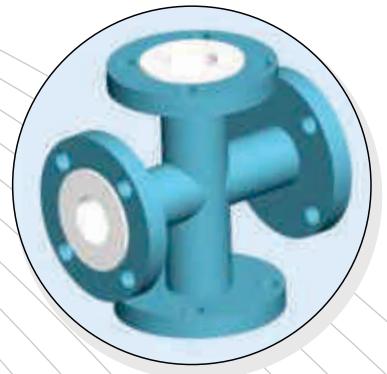
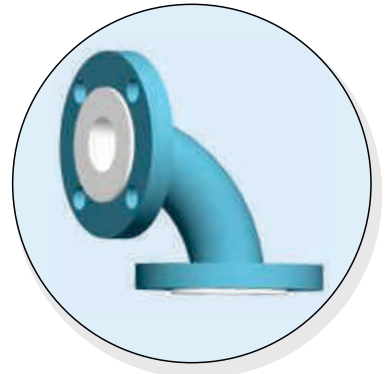
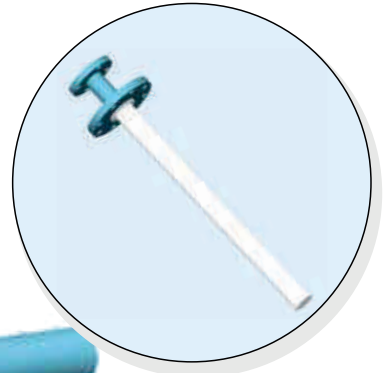



Heta Glass Industries

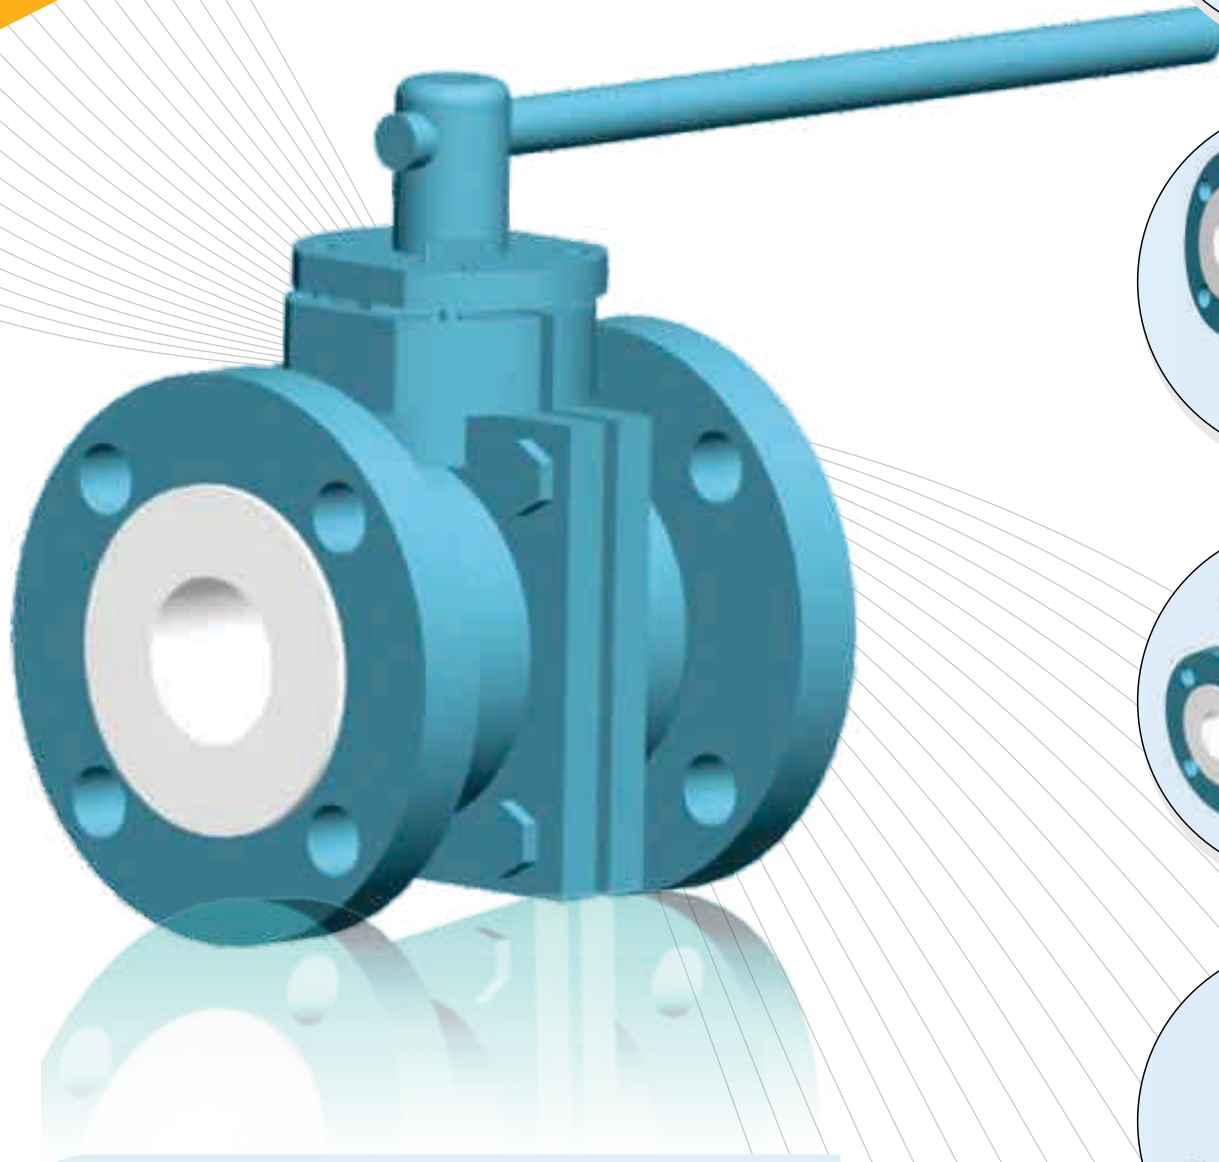

**ULTIMATE SOLUTION FOR
FLUID TRANSMISSION WORLD...**



LINED SPOOL PIPE

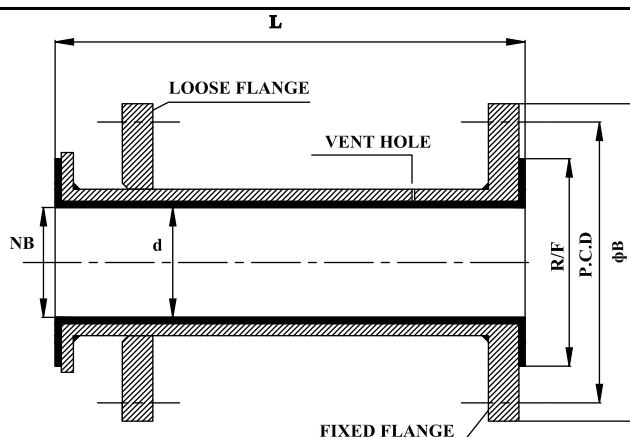

Nominal Bore (NB)		Internal Dia. (d)	PTFE Liner Thickness (t)	FLANGE P. C. D	Flange Hole Dia.	Raised Face Dia. (R/F)	Max. Length	Pipe Schedule
mm	Inches	(± 1 mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
25	1	19.5	3.3	79.4	15.9	51	3000	40
40	1.5	33.8	3.3	98.4	15.9	73	3000	40
50	2	45.4	3.3	120.6	19.0	92	3000	40
80	3	70.8	3.3	152.4	19.0	127	3000	40
100	4	95.2	3.8	190.5	19.0	157	3000	40
150	6	145.1	4.5	241.3	22.2	216	3000	40
200	8	197.4	5.0	298.4	22.2	270	3000	30
250	10	249.3	6.0	362.0	25.4	324	3000	30
300	12	300.1	6.0	431.8	25.4	381	3000	30

HOUSING MATERIAL

Pipe : 1. Seamless Carbon Steel ASTM A 106 Gr. B.Sch-40
2. ASTM A 312 TP 304, Sch-40

Flanges : 1. Made from Is 2062 Plates / ASTM A 105
2. ASTM A 351 Gr.CF8

Liner : PTFE In accordance with ASTM D 1457

OPTIONS

Pipe : Jacketed Spool Pipe can be supplied on request

Flanges : DIN PN 10 / 16, BS 10, ASME 300, Mixed

Material : Stainless Steel

Extras : Earthing Studs / Lugs Vent Extensions

NOTE

Special heavy duty PTFE Liners available for full vacuum. Details can be provided on request Other flanges drilling like DIN 2632 / 2633, BS 10 Table D, E o F are also available on request. Tolerance: ± 3.5 mm (0 to 1 mtr.) and ± 5.0 mm (1 to 3 mtr.).

TEST & INSPECTION DATA

Hydraulic Test : 20 kg/cm² After Lining

Spark Test : 15 KV D.C. After Lining

HG

Honesty

Efficiency

Transparency

Ambitions



**Heta Glass
Industries**

Office & Factory :

336/25/A, G.I.D.C., Makarpura, Vadodara-390010

M : 098250 76022, 099789 00795, Ph. : 0265 - 2637622

E-mail : hiren@hetaglass.com • nimesh@hetaglass.com